


新・つくば耐力壁 参考標準納まり例図 (単位:mm)

<p>105角 - 105角 (105 × 150)</p> <p>新・つくば耐力壁</p> <p>中棧 105</p>	<p>105角 - 120角 (120 × 150)</p> <p>新・つくば耐力壁</p> <p>中棧 105</p>	<p>120角 - 105 × 150</p> <p>新・つくば耐力壁</p> <p>中棧 120</p>	<p>構造用面材</p> <p>HD金物</p> <p>新・つくば耐力壁</p> <p>筋かい金物</p>	<p>柱</p> <p>筋かい金物</p> <p>中棧</p>
<p>120角 - 120角 (120 × 150)</p> <p>新・つくば耐力壁</p> <p>中棧 120</p>	<p>105角 - 120角 (120 × 150)</p> <p>新・つくば耐力壁</p> <p>中棧 105</p>	<p>105角 - 120角</p> <p>新・つくば耐力壁</p> <p>中棧 105</p>	<p>構造用面材 (非耐力壁)</p> <p>構造用面材</p> <p>筋かい金物</p> <p>新・つくば耐力壁</p>	<p>筋かい</p> <p>柱</p> <p>筋かい金物</p> <p>HD金物</p>

BCJ評定-LW0104-02

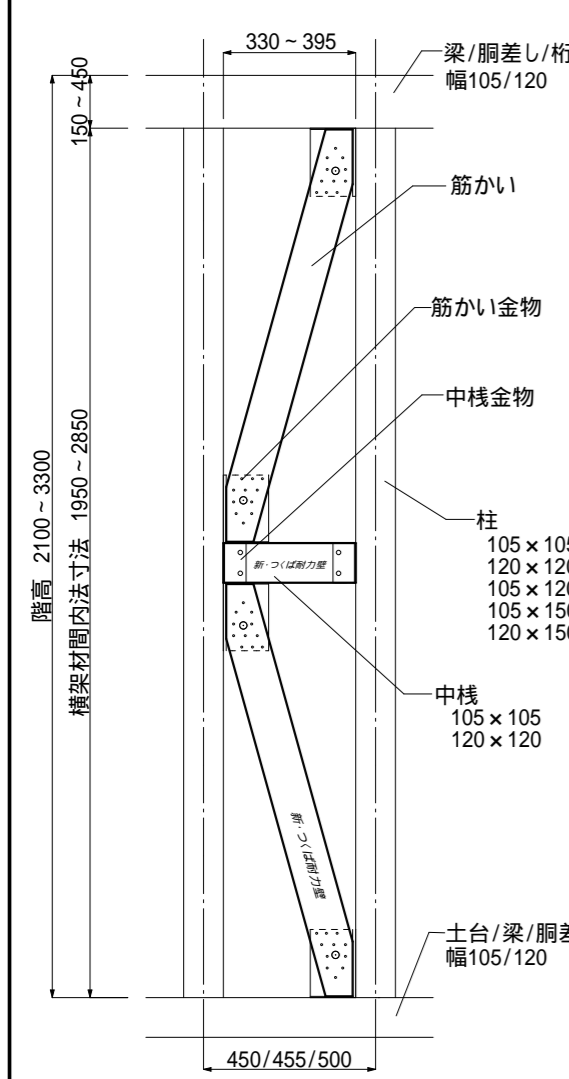

筋かい 45 × 105	筋かい仕様	筋かい+面材仕様
横架材間内法寸法	1mあたり相当壁倍率 (許容せん断耐力)	1mあたり相当壁倍率 (許容せん断耐力)
S:1950以上 ~ 2250未満	5.09倍 (9.99 kN/m)	6.91倍 (13.56 kN/m)
M:2250以上 ~ 2550以下	4.61倍 (9.05 kN/m)	6.37倍 (12.50 kN/m)
H:2550超 ~ 2850以下	4.13倍 (8.11 kN/m)	5.83倍 (11.44 kN/m)

